

NORDIKA SERIES 420W/440W

**NT5 N-type
Bifacial Ultra Black**



Bifacial technology enables additional energy harvesting from rear side (up to 30%)



30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module



N-type solar cell has no LID naturally which can increase power generation



Excellent low irradiance performance



Better light trapping and current collection to improve module power output and reliability



Industry leading lowest thermal co-efficient of power




Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient



Certified to withstand: wind load and snow load (Front 8000 Pa - Back 5400 Pa)




100% triple EL test enabling remarkable reduction of hidden crack rate of modules

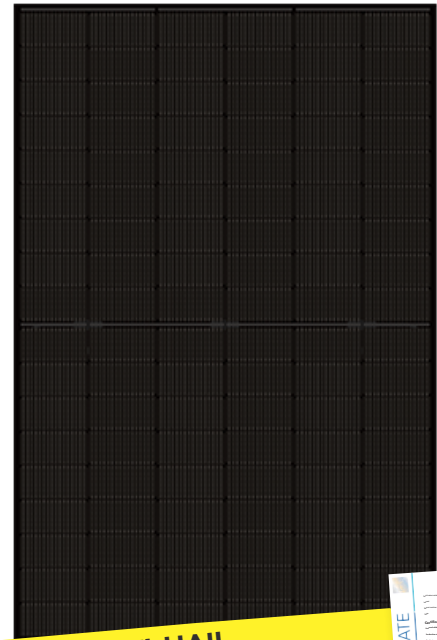


**ANTI-HAIL
CERTIFIED PANELS
CERTIFICATE 8000 Pa - 5400 Pa**



LINEAR PERFORMANCE WARRANTY

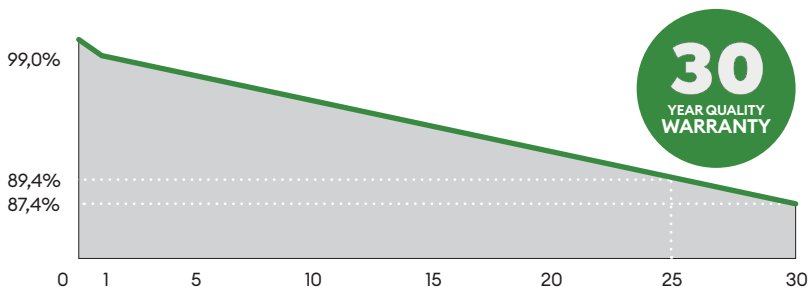

PERFORMANCE INSURANCE



ABOUT OMNIS POWER

Omnis Power was founded in 2010 by a group of entrepreneurs with experience in the energy sector and a common idea: to innovate the renewable energy sector. Arising from several spin-offs of leading companies in the industry, Omnis Power is at the forefront of new technology research and competitive product development.

Today, Omnis Power is a European company with international experience that believes and invests in Europe. The increasingly strong group already has offices in Italy, Lithuania, Estonia, Germany and Norway in addition to numerous partners around the world.

ELECTRIC CHARACTERISTICS

NT5 N-TYPE 420/440 W BF

Model of modules	OP420M54-NT5-BF		OP425M54-NT5-BF		OP430M54-NT5-BF		OP435M54-NT5-BF		OP440M54-NT5-BF	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power — P_{mp} (W)	420	316	425	320	430	324	435	325	440	329
Open-circuit voltage — V_{oc} (V)	38.13	35.90	38.24	36.00	38.34	36.10	38.43	36.00	38.53	36.10
Short-circuit current — I_{sc} (A)	14.07	11.34	14.16	11.41	14.25	11.48	14.34	11.56	14.43	11.63
Maximum power voltage — V_{mp} (V)	31.49	29.60	31.64	29.70	31.79	29.90	31.94	29.80	32.09	29.90
Maximum power current — I_{mp} (A)	13.34	10.67	13.44	10.75	13.53	10.84	13.62	10.91	13.72	11.00
Module efficiency — η_m (%)	21.51		21.76		22.02		22.28		22.53	

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5, Flash test tolerance +- 5%

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

ELECTRICAL CHARACTERISTICS WITH DIFFERENT POWER BIN (REFERENCE TO 15% IRRADIANCE RATIO)

Peak Power (P_{max}) (W)	483	488.75	494.5	500.25	506
Open Circuit Voltage (V_{oc}) (V)	38.13	38.24	38.34	38.43	38.53
Short Circuit Current (I_{sc}) (A)	16.18	16.28	16.39	16.49	16.59
MPP Voltage (V_{mp}) (V)	31.49	31.64	31.79	31.94	32.09
MPP Current (I_{mp}) (A)	15.34	15.45	15.56	15.66	15.77

STRUCTURAL CHARACTERISTICS

Module dimensions (L*W*H)	1722 x 1134 x 30 mm
Weight	23.3 kg
Cell	108 cells, N-type Monocrystalline 182 x 91 mm
Front glass	2.0mm, Anti-Reflection Coating
Back glass	2.0mm, Heat Strengthened Glass
Frame	Black Anodized aluminum alloy
Junction box	IP68, 3 diodes
Output wire	4.0 mm ²
Wire length	300mm/1100mm/customized
Connector	MC4 Compatible
Packing Specification	36pcs/Pallet; 936 pcs/40'HQ

OPERATING PARAMETERS

Power tolerance (W)	(0,+5)
Maximum system voltage (V)	1500
Maximum rated fuse current (A)	30
Current operating temperature (°C)	-40~+85 °C
Mechanical load	8000 Pa / 5400 Pa

TEMPERATURE RATINGS

Temperature coefficient (P_{max})	-0.30 %/°C
Temperature coefficient (V_{oc})	-0.25 %/°C
Temperature coefficient (I_{sc})	+0.046 %/°C
Nominal operating cell temperature	45 ± 2 °C

MODULE DIMENSIONS (MM)

